

11/03/00



A/R

35 G1008 CIP/C/REI  
09/104703

## REISSUE PATENT APPLICATION TRANSMITTAL

Address to:  <b>Assistant Commissioner for Patents Box Patent Application Washington, DC 20231</b>	Attorney Docket No.	35.G1008 CIP/C/REI
	First Named Inventor	NAOKI NISHIMURA
	Original Patent Number	5,831,944
	Original Patent Issue Date	November 3, 1998
	Express Mail Label No.	
	Total Pages	18

APPLICATION FOR REISSUE OF:  
(check applicable box)

Utility Patent



Design Patent



Plant Patent

APPLICATION ELEMENTS	ACCOMPANYING APPLICATION PARTS
1. <input type="checkbox"/> Fee Transmittal Form (PTO/SB/56) (Submit an original, and a duplicate for fee processing)	7. Transfer Drawings from Patent File
2. <input checked="" type="checkbox"/> Specification and Claims (amended, if appropriate)	8. Foreign Priority Claim (35 USC 119)
3. <input checked="" type="checkbox"/> Drawing(s) (proposed amendments, if appropriate)	9. Information Disclosure Statement (IDS)/PTO-1449
4. <input type="checkbox"/> Reissue Oath/Declaration (37 CFR 1.175) (PTO/SB/51 or 52)	Copies of IDS Citations
5. Original U.S. Patent <input type="checkbox"/> Offer to Surrender Original Patent (37 CFR 1.178) (PTO/SB/53 or PTO/SB/54) or <input type="checkbox"/> Ribbonded Original Patent Grant <input type="checkbox"/> Affidavit/Declaration of Loss (PTO/SB/55)	10. English Translation of Reissue Oath/Declaration (if applicable)
6. Original U.S. Patent currently assigned? <input type="checkbox"/> Yes <input type="checkbox"/> No  (If Yes, check applicable box(es)) <input type="checkbox"/> Written Consent of all Assignees (PTO/SB/53 or 54)	11. Small Entity Statement(s) Statement filed in prior application Status still proper and desired
	12. <input checked="" type="checkbox"/> Preliminary Amendment
	13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
	14. <input checked="" type="checkbox"/> Other: <u>EFS Form</u>

## 15. CORRESPONDENCE ADDRESS

<input checked="" type="checkbox"/> Customer Number or Bar Code Label	05514 (Insert Customer No. or Attach bar code label here)	or Correspondence address below	
NAME			
ADDRESS			
CITY	STATE	ZIP CODE	
COUNTRY	TELEPHONE	FAX	

+

CLAIMS		(4) RATE	(5) CALCULATIONS
	Claims in excess of twenty and also in excess of the number of claims in the original patent = 0	X \$ 18.00 =	\$ 0.00
	Independent claims in excess of the number of independent claims in the original patent = 1	X \$ 80.00 =	\$ 80.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))	\$270.00 =	\$ 0.00
		BASIC FEE (37 CFR 1.16(a))	\$710.00
	Total of above Calculations =		\$790.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).		
	TOTAL =		\$790.00


## 16. Small entity status

- a. A Small entity statement is enclosed
- b. A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. Is no longer claimed.

## 17. A check in the amount of \$ \_\_\_\_ is enclosed.

## 18. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. Fees required under 37 CFR 1.16.
- b. X Fees required under 37 CFR 1.17.
- c. Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED	
NAME	PETER SAXON, Reg. No. 24,947
SIGNATURE	
DATE	November 2, 2000

#### INVENTOR INFORMATION

Inventor One Given Name:: NAOKI  
Family Name:: NISHIMURA  
City:: Tokyo,  
State or Province:: Japan  
Country:: Japan  
City of Residence:: Tokyo  
State or Province of Residence:: Japan  
Country of Residence:: Japan  
Citizenship Country:: Japan

#### CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 05514  
Fax:: (212) 218-2200

#### APPLICATION INFORMATION

Title Line One:: MAGNETO-OPTICAL RECORDING MEDIUM AND METHOD  
Title Line Two:: FOR REPRODUCING INFORMATION FROM A  
Title Line Three:: MAGNETO-OPTICAL RECORDING MEDIUM HAVING THREE  
Title Line Four:: LAYERS

Total Drawing Sheets:: 14  
Formal Drawings?: Yes  
Application Type:: Utility  
Docket Number:: 35.G1008 CIP/C/REI  
Secrecy Order in Parent Appl.?: No

#### REPRESENTATIVE INFORMATION

Representative Customer Number:: 05514

#### PRIOR FOREIGN APPLICATIONS

Foreign Application One:: 5-038138  
Filing Date:: February 26, 1993  
Country:: Japan  
Priority Claimed:: Yes  
Foreign Application Two:: 6-022653  
Filing Date:: February 21, 1994  
Country:: Japan  
Priority Claimed:: Yes  
Foreign Application Three:: 4-230265  
Filing Date:: August 28, 1992  
Country:: Japan  
Priority Claimed:: Yes

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Reissue Application:	)	Previous
of U.S. Patent No. 5,831,944	:	Examiner: A. Neyzari
	)	
NAOKI NISHIMURA	:	Previous
	)	Group Art Unit: 2752
Appln No.: Not Yet Assigned	:	
	)	
Filed: Herewith	:	
	)	
For: MAGNETO-OPTICAL	:	
RECORDING MEDIUM AND	)	
METHOD FOR REPRODUCING	:	
INFORMATION FROM A	)	
MAGNETO-OPTICAL	:	
RECORDING MEDIUM HAVING	)	
THREE LAYERS	:	
	)	
Issued: November 3, 1998	:	November 2, 2000

**BOX REISSUE**

Commissioner for Patents  
Washington, D.C. 20231

PRELIMINARY AMENDMENT

The present application is for reissue of the above-identified issued U.S. Patent No. 5,831,944. The errors which create the basis for this reissue application relate to the failure to claim the invention as broadly as the inventor was entitled to in view of his disclosure. Additionally, the Applicant in some respects failed to claim the invention as specifically as believed necessary to adequately describe the

scope of his invention as to certain embodiments. Accordingly, Applicant seeks to add new claims to obtain claims of appropriate scope and asks that the application be amended as follows:

IN THE CLAIMS:

Please add the following new claims 3-5.

--3. A magneto-optical recording medium comprising:  
a readout layer, which has an in-plane magnetization at  
room temperature range, and which changes to a perpendicular  
magnetization in a temperature range above room temperature;  
a recording layer having a perpendicular magnetization in  
a temperature range between room temperature and its Curie  
temperature; wherein the reproducing layer is magnetically  
coupled to the recording layer by magneto-static coupling.

4. A magneto-optical recording medium according to claim  
3, further comprising:  
an intermediate layer, wherein the intermediate layer is  
interposed between said reproducing and recording layers.

5. A magneto-optical recording medium according to claim  
4, wherein said intermediate layer has a Curie temperature lower

than the Curie temperature of said reproducing layer and recording layer.--

#### REMARKS

Applicant now seeks to add new claims 3-5 via reissue of U.S. Patent 5,831,944. Thus, the claims now pending are claims 1-2 in the originally issued patent, and newly presented claims 3-5.

The claims as originally issued are too narrow in scope in view of Applicant's invention as described in the teachings of the disclosure. The newly added claims are broader in some respects and narrower in other respects than the originally issued claims 1-2. Specifically, in terms of product limitations, claim 3 does not recite a third magnetic layer. However, claims 4 and 5 are directed to the additional element of an intermediate layer.

Further, the functional limitation in the preamble of originally issued claim 1, "adapted to be heated from a room temperature range to a medium temperature range above the room temperature range and to a high temperature range above the medium temperature range," is considered to be unnecessary in new claim 3, and has been deleted.

Support for claims 3-5 may be found in U.S. Patent

5,831,944 as shown in the following claim chart:

New Claims 3 - 5	Support
3. A magneto-optical recording medium comprising:	Col. 2, lines 46, 47
a readout layer, which has an in-plane magnetization at room temperature range, and which changes to a perpendicular magnetization in a temperature range above room temperature;	Col. 4, lines 1-6
a recording layer having a perpendicular magnetization in a temperature range between room temperature and its Curie temperature;	Col. 4, lines 6-10; Col. 4, lines 46-59
wherein the reproducing layer is magnetically coupled to the recording layer by magneto-static coupling	Col. 4, lines 36, 37; Col. 6, lines 10-20
4. further comprising an intermediate layer, wherein the intermediate layer is interposed between said reproducing and recording layer	Col. 4, lines 36-38 Col. 6, lines 34-43
5. wherein said intermediate layer has a Curie temperature lower than the Curie temperature of said reproducing layer and recording layer	Col. 6, lines 39-43

Claims 3-5 are narrower than the originally issued claims in that the magnetic coupling between the readout layer and the recording layer is limited to magneto-static coupling. Support for this limitation is found at least at column 4, lines 36-37 and column 6, lines 8-12.

For the Examiner's convenience, a side-by-side comparison of the limitations of originally issued claim 1 and new claims 3-5 is provided below.




Originally Issued Claim 1	New Claims 3-5
A magneto-optical recording medium adapted to be heated from a room temperature range to a medium temperature range above the room temperature range and to a high temperature range above the medium temperature range, said medium comprising:	3. A magneto-optical recording medium comprising:
a first magnetic layer, which has an in-plane magnetization at the room temperature range, and which changes to a perpendicular magnetization at the medium temperature range;	a readout layer, which has an in-plane magnetization at room temperature range, and which changes to a perpendicular magnetization in a temperature range above room temperature;
a second magnetic layer having a perpendicular magnetization; and	a recording layer having a perpendicular magnetization in a temperature range between room temperature and its Curie temperature; wherein the reproducing layer is magnetically coupled to the recording layer by magneto-static coupling
a third magnetic layer, wherein the third magnetic layer is interposed between said first and second magnetic layers, and has a Curie temperature lower than those of said first and second magnetic layers, and has an in-plane magnetization at the room temperature range and changes to a perpendicular magnetization at the medium temperature range.	CLAIM 4:  further comprising an intermediate layer, wherein the intermediate layer is interposed between said reproducing and recording layer  CLAIM 5:  wherein said intermediate layer has a Curie temperature lower than the Curie temperature of said reproducing layer and recording layer

Entry and consideration of the claims found in this Preliminary Amendment and early passage to issue of this reissue application are earnestly requested.

Applicant's undersigned attorney may be reached in our New York office by telephone at (212) 218-2100. All correspondence should continue to be directed to our address given below.

Respectfully submitted,



Attorney for Applicant

Registration No. 24947

FITZPATRICK, CELLA, HARPER & SCINTO  
30 Rockefeller Plaza  
New York, New York 10112-3801  
Facsimile: (212) 218-2200

NY\_MAIN 117099 v 1

# **MAGNETOOPTICAL RECORDING MEDIUM AND METHOD FOR REPRODUCING INFORMATION FROM A MAGNETOOPTICAL RECORDING MEDIUM HAVING THREE LAYERS**

This application is a continuation of application Ser. No. 08/389,579 filed Feb. 15, 1995, now abandoned, which in turn is a continuation-in-part of application Ser. No. 08/111,974 filed Aug. 26, 1993, now abandoned in favor of continuation application Ser. No. 08/643,833 filed May 7, 1996, which issued as U.S. Pat. No. 5,616,428 on Apr. 1, 1997.

## **BACKGROUND OF THE INVENTION**

### **1. Field of the Invention**

The present invention relates to a magneto-optical recording medium allowing information recording and reproduction by irradiation with a laser beam, utilizing magneto-optic effect, and particularly to a magneto-optical reproducing method and magneto-optical recording medium which enables a higher-density medium by improving linear recording density and track density.

### **2. Related Background Art**

In recent years, a magneto-optical recording medium has become a subject of attention in the field of a rewritable recording method of high recording density. In such a recording method, information or data is recorded in the recording medium by forming a magnetic domain in a magnetic film of the medium by means of thermal energy of a laser beams emitted from a semiconductor laser, and information is read out from the medium, utilizing magneto-optical effect. The above-noted trend is based on need for a larger amount of recording capacity to be achieved by higher recording density of such a recording medium.

By the way, the linear density of an optical disc, such as a magneto-optical recording medium, is largely dependent on the wavelength of a laser beam and the numerical aperture of an objective lens used in an optical system for reproducing information. When the wavelength  $\lambda$  of a laser beam used in a reproducing optical system and the numerical aperture NA of an objective lens are determined, a bit or pit periodicity or pitch is defined as  $\lambda/2NA$  which is a minimum scale or limit of detection.

Track density of the optical disc is, on the other hand, chiefly limited by crosstalk. The crosstalk is largely dependent on a laser beam distribution or profile on a medium surface and is expressed as a function of  $\lambda/2NA$ , similar to the bit periodicity mentioned above. Thus, the wavelength of a laser beam must be shortened and the numerical aperture NA of an objective lens must be enlarged in order to increase the recording density of the conventional optical disc.

However, there are limitations to improvement of the wavelength of a laser beam and the numerical aperture of an objective. Techniques therefor have been developed, which improve the structure of a recording medium and a method of reading out data bits so that the linear recording density can be improved.

For example, Japanese Patent Laid-Open No. 3-93058 discloses a method for improving the linear recording density and track density. The process is performed in the following sequence. First, a recording medium, which comprises a readout layer and a recording layer, is prepared. After the direction of magnetization in the readout layer is oriented in a single direction prior to information reproduction, then information held in the recording layer is

transferred to the readout layer. Thus, it becomes possible to reduce interference between codes at the time of information reproduction and to reproduce information recorded at a pitch below the diffraction limit of light (magnetic super-resolution).

However, the magneto-optical reproducing method of Japanese Patent Laid-Open No. 3-93058 requires a step of aligning the magnetization direction of the readout layer in a predetermined direction, which is conducted before projection of a laser beam onto the readout layer. Thus, it is necessary to add a magnet for initializing the readout layer to a conventional apparatus. Due to such addition, problems arise, such as more complicated structure of a magneto-optical recording apparatus, difficulty of down-sizing, and higher cost of an apparatus.

The inventors previously proposed a method for realizing magnetic super-resolution by a simple film structure without the need for an external magnetic field at the time of reproduction. This method uses a magneto-optical recording medium comprising two layers including a readout layer which is an in-plane magnetization film at room temperature and changed to a perpendicular magnetization film at raised or high temperatures, and a recording layer which is composed of a perpendicular magnetization film. In this method, for realizing magnetic super-resolution, the readout layer is used as an in-plane magnetization film within a low-temperature area in a light spot, and as a perpendicular magnetization film within a high-temperature area for transferring magnetization information stored in the recording layer and reproducing the information.

However, in such a super-resolution medium comprising the in-plane magnetization film, only the high-temperature area within a light spot is a reproducible area. It is thus difficult to stably provide a reproduction area having a predetermined space, and signal output is possibly decreased because the reproduction area is at the edge of the light spot.

#### SUMMARY OF THE INVENTION

In consideration of the above problems, it is an object of the present invention to provide a magneto-optical recording medium which enables realization of high S/N reproduction of information recorded at a pitch below the diffraction limit of light with a simple structure, and a method for reproducing information using the recording medium.

The object is attained by a magneto-optical recording medium comprising a first magnetic layer which is an in-plane magnetization film at both room temperature and raised or high temperatures and changed to a perpendicular magnetization film at intermediate temperatures, and a second magnetic layer which is composed of a perpendicular magnetization film.

Further, the object is attained by a method of reproducing, by using a laser beam, information recorded on a magneto-optical recording medium comprising a first magnetic layer which is an in-plane magnetization film at both room temperature and raised or high temperatures and changed to a perpendicular magnetization film at intermediate temperatures, and a second magnetic layer which is composed of a perpendicular magnetization film. The method comprises a step of projecting the laser beam on the recording medium from the side of the first magnetic layer, a step of changing both low-temperature and high-temperature areas within a light beam projection portion of the first magnetic layer to an in-plane magnetization film, and an intermediate-temperature area thereof into a perpendicular magnetization film, a step of performing exchange coupling

of the perpendicular magnetization of the first magnetic layer and the magnetization of the second magnetic layer to transfer the information recorded on the second magnetic layer to the first magnetic layer, and a step of reproducing the recorded information based on the magneto-optic effect of light reflected from the recording medium.

The recording medium and reproducing method will be described in detail below with reference to embodiments.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic view showing a film structure in accordance with an embodiment of the present invention.

FIG. 2 is a schematic view showing a film structure in accordance with another embodiment of the present invention.

FIGS. 3(a) and (b) are schematic views showing the wholes of film structures of the present invention.

FIG. 4 is a graph illustrating an example of the temperature dependencies of  $2\pi Ms^2$  and perpendicular magnetic anisotropy constant  $K_u$  of a readout layer.

FIG. 5 is a schematic view illustrating an example of an information reproducing method of the present invention.

FIG. 6 is a schematic view illustrating a magnetized situation when an intermediate layer is provided between a readout layer and a recording layer according to the present invention.

FIGS. 7(a) and 7(b) is a schematic view illustrating a magnetized situation when an intermediate layer with small in-plane anisotropy is provided.

FIGS. 8(a) and 8(b) is a schematic view illustrating a magnetized situation when an intermediate layer with large in-plane anisotropy is provided.

FIG. 9 is a schematic view illustrating another example of an information reproducing method of the present invention.

FIGS. 10(a) through 10(c) is a graph illustrating the temperature dependencies of  $M_s$  when an intermediate layer is provided between a readout layer and a recording layer according to the present invention.

FIG. 11 is a schematic view illustrating the relation between the beam intensity of a light spot and detection region within the light spot.

FIG. 12 is a schematic view illustrating an information reproducing method of a comparative example.

FIG. 13 is a graph illustrating an example of the temperature dependency of a residual  $\theta_K$  (when a magnetic field=0) of the recording medium of the present invention.

FIG. 14 is a graph illustrating an example of the temperature dependency of a residual  $\theta_K$  (when a magnetic field=0) of the recording medium of the present invention.

FIG. 15 is a graph illustrating an example of the temperature dependency of a residual  $\theta_K$  (when a magnetic field=0) of a recording medium of a comparative example.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

A magneto-optical recording medium and reproducing method using the recording medium of the present invention are described in detail below with reference to the drawings. Hereinafter, a first magnetic layer, a second magnetic layer and a third magnetic layer are referred to as a readout layer, a recording layer and an intermediate layer, respectively.

The magneto-optical recording medium of the present invention is composed of at least two layers: a readout layer

and a recording layer. The readout layer remains an in-plane magnetization film at room temperature, is changed into a perpendicular magnetization film when the temperature is raised, and is changed into an in-plane magnetization film or eliminates magnetization when the temperature is further raised. The recording layer remains a perpendicular magnetization film not only at room temperature but also at raised temperatures. The above-described states of the readout layer and the recording layer are states when these layers are laminated.

The readout layer is preferably composed of, for example, a rare-earth and iron group amorphous alloy, such as GdCo, GdFeCo, GdTbFeCo, GdDyFeCo or NdGdFeCo. By "iron group" is here meant the elements Fe, Co, and Ni. Material having small magnetic anisotropy and compensation temperature between room temperature and Curie temperature is preferable.

The recording layer is preferably composed of material having large perpendicular magnetic anisotropy and being capable of stably maintaining the magnetized state, for example, a rare earth and iron group amorphous alloy, such as TbFeCo, DyFeCo or TbDyFeCo; garnet; or a platinum group and iron group periodical structure layer, such as Pt/Co or Pd/Co; or a platinum group and iron group alloy, such as PtCo or PdCo. By "platinum group" is here meant the elements Ru, Rh, Pd, Os, Ir, and Pt. Further, an element for improving corrosion resistance, such as Cr, Al, Ti, Pt, Nd or the like, may be added to each of the readout and recording layers as the magnetic layers.

Dielectric, such as SiNx, AlNx, TaOx, SiOx or the like, may be added to the readout and recording layers in order to improve interference effect. Material for improving thermal conductivity, such as Al, AlTa, AlTi, AlCr, Cu or the like, may be provided.

An intermediate layer for adjusting exchange coupling force or magnetostatic coupling force, or an auxiliary layer for assistance of recording or reproduction may be formed. A protecting coating, which is composed of the above-discussed dielectric or polymer resin, may be used as a protective film.

The following description deals with the recording-reproducing method of the present invention.

Referring to FIG. 1, data signals are first recorded in the recording layer of the magneto-optical recording medium of the present invention. One way of recording data signals in the recording layer is to modulate an external magnetic field while projecting a laser beam powerful enough to raise the temperature of the recording layer to over Curie temperature. Another way is to modulate laser power while applying a magnetic field in the recording direction, after eliminating data in the recording layer. The other way is to modulate a laser power while applying an external magnetic field.

When the intensity of the laser beam is determined so that the temperature of a predetermined region within a beam spot is raised close to Curie temperature of the recording layer, considering the linear velocity of the recording medium, a recording magnetic domain, which is less than the diameter of the laser beam spot, is formed. As a result, it is possible to record signals having a periodicity less than the diffraction limit of light.

When reproducing the data signal, a readout laser beam is projected onto the recording medium. At this time, however, the temperature in the region, irradiated with the beam, rises. Since the medium moves at a constant speed, the temperature distribution on the recording medium has a shape extending along the moving direction of the recording

medium, as shown in FIG. 5 or 9. In the temperature distribution, a part within the beam spot is a high-temperature area.

A two-layer structure magneto-optical recording medium basically comprising the readout layer and the recording layer of the present invention is first described below.

With regard to a magnetic thin film comprising a single layer, it is known that a chief magnetization direction is determined by an effective perpendicular magnetic anisotropy constant  $K_L$  that is defined by the following equation 1:

$$K_L = K_u - 2\pi M_s^2 \quad (1)$$

wherein  $M_s$  is the saturation magnetization of the magnetic thin film, and  $K_u$  is the perpendicular magnetic anisotropy constant. When  $K_L$  is positive, the magnetic film becomes a perpendicular magnetization film. When  $K_L$  is negative, the magnetic film becomes an in-plane magnetization film. Here,  $2\pi M_s^2$  is energy of demagnetizing field.

For example, when the magnetic film has temperature dependency of  $M_s$  and  $K_u$  as shown in FIG. 4, the magnetic film is an in-plane magnetization film since the following equation 2 is established:

$$K_u < 2\pi M_s^2, K_L < 0 \quad (2)$$

However, at the time of information reproduction,  $M_s$  of the readout layer decreases since the temperature increases. Thus,  $2\pi M_s^2$  rapidly decreases and becomes smaller than the perpendicular magnetic anisotropy constant  $K_u$ , as shown by the following relation 3:

$$K_u > 2\pi M_s^2, K_L > 0 \quad (3)$$

As a result, the readout layer becomes a perpendicular magnetization film.

When the temperature further increases, the relation between  $2\pi M_s^2$  and  $K_u$  is again reversed after compensation temperature, and the following relation 4 is again obtained:

$$K_u < 2\pi M_s^2, K_L < 0 \quad (4)$$

As a result, the readout layer again becomes an in-plane magnetization film.

Namely, a state is realized in which the readout layer becomes an in-plane magnetization film in the highest-temperature and low-temperature regions within a portion of the light spot, and the readout layer becomes a perpendicular magnetization film in the medium-temperature region thereof, as shown in FIG. 5. Since the readout layer, which is a perpendicular magnetization film, is magnetically coupled to the recording layer due to exchange coupling therebetween, the direction of magnetization in the readout layer is aligned along a stable direction for the magnetization direction of information recorded in the recording layer. Thus, the information recorded in the recording layer is transferred into the readout layer. The transferred information is converted into an optical signal by magneto-optic effect (magneto-optic effect (polar Kerr effect) of a laser beam reflected from the readout layer) of the readout layer, and detected. Namely, the information is detected by detecting the light reflected from the readout layer. In this case, the magneto-optic effect (polar Kerr effect) would not occur in a portion within the light spot where the readout layer is an in-plane magnetization film.

Thus, as shown in FIG. 5, a masked region for masking magnetization information in the recording layer, and an aperture region for detecting the information are formed

within the light spot. Since the aperture region can be formed to have an area smaller than the light spot, signals having a periodicity below the diffraction limit of light can be detected, thereby increasing the linear density.

Since it is also possible to mask a mark on an adjacent track, the density of the adjacent track can be improved.

Although a case of magnetic coupling due to exchange coupling between the readout layer and the recording layer is described above, it is possible that the recording layer is magnetically coupled to the readout layer due to magnetostatic coupling at the time of reproduction. When the readout layer and the recording layer are layered directly or with an intermediate layer therebetween,  $K_u$  apparently increases due to the exchange coupling force or magnetostatic coupling force applied from the perpendicular magnetization film, and thus the temperature region serving as a perpendicular magnetization film shifts to a lower temperature side, compared with a case where the readout layer and recording layer are not layered. If presetting a perpendicular magnetization temperature region in a single layer film at a slightly higher value, even when the readout layer is layered with the perpendicular magnetization layer, it is possible that the readout layer is an in-plane magnetization film at room temperature and high temperatures, and shifts into a perpendicular magnetization film only in the medium temperature region.

Masking may be achieved at the highest-temperature point or region by disappearance of magnetization in the readout layer. However, the signal level in readout might be slightly reduced because Curie temperature  $T_c$  of the readout layer needs to be lower than Curie temperature  $T_c$  of the recording layer.

The following is an example of an improved magneto-optical recording medium of the present invention, which contains an intermediate layer between a readout layer and a recording layer as shown in FIG. 6, and thus basically comprises three magnetic film layers.

In this example, the intermediate layer is interposed between the readout layer and the recording layer, and Curie temperature of the intermediate layer is higher than room temperature and lower than Curie temperatures of the readout and recording layers. Material for the intermediate layer may be a rare-earth and iron group amorphous alloy, such as TbFe, GdFe, TbFeCo or GdFeCo, or such an alloy into which a non-magnetic element such as Al, Cu and Cr or added.

When the readout layer and the recording layer are layered, the exchange coupling force from the recording layer acts in a direction to make the spin (magnetization) direction of the readout layer perpendicular. Thus, the perpendicular magnetic anisotropy of the readout layer apparently increases. Although this apparent increase in the perpendicular magnetic anisotropy is omitted in the above description, the effective perpendicular magnetic anisotropy  $K_{\perp}$  will be handled below in consideration of the increase.

Assuming that the thickness of the readout layer is  $h_1$ , saturation magnetization is  $M_s$ , perpendicular magnetic anisotropy constant is  $K_u$ , and energy of the interface magnetic domain walls between the readout layer and the recording layer is  $\sigma_w$ , when the thickness of the interface magnetic domain walls is neglected, an increase in perpendicular magnetic anisotropy of the readout layer due to exchange coupling force is expressed by  $\sigma_w/(4h_1)$ .

Thus, the effective perpendicular magnetic anisotropy constant  $K_{\perp}$  is as follows:



$$K_L = Ku + \frac{\sigma_w}{4h_1} - 2\pi Ms^2 \quad (5)$$

As shown in FIG. 6, the readout layer is subjected to the exchange coupling force from the recording layer at room temperature (RT), but energy of a demagnetizing field is dominant because of large  $M_s$  within a low-temperature region near room temperature. As a result, the following relation 6 is obtained, and the readout layer becomes an in-plane magnetization film.

$$Ku + \frac{\sigma_w}{4h_1} < 2\pi Ms^2, K_L < 0 \quad (6)$$

Similar to the above example, in a portion of the magneto-optical recording medium where the temperature increases due to projection of the readout laser beam,  $M_s$  of the readout layer decreases, and thus  $2\pi Ms^2$  rapidly decreases. As a result, the above relation is reversed, as shown by the following relation 7, and the readout layer becomes a perpendicular magnetization film.

$$Ku + \frac{\sigma_w}{4h_1} > 2\pi Ms^2, K_L > 0 \quad (7)$$

However, in a high-temperature region within the light spot, like at room temperature, the readout layer is an in-plane magnetization film.

The intermediate layer functions as a mediator of exchange coupling force from the recording layer to the readout layer, until its Curie temperature is reached, and information in the recording layer is transferred to the readout layer.

However, in the high-temperature portion within the light spot, the temperature of the intermediate layer reaches its Curie temperature. The intermediate layer has such a composition that Curie temperature is reached, or laser power is set so that Curie temperature is reached. In this portion, thus, the exchange coupling force is eliminated, and the perpendicular magnetic anisotropy constant of the readout layer rapidly decreases in appearance. Therefore, the magnetization direction of the readout layer becomes an in-plane direction again (refer to FIG. 6). Namely, the energy of the interface domain walls between the readout layer and the recording layer becomes 0, and the following relation (8) is obtained:

$$Ku < 2\pi Ms^2, K_L < 0 \quad (8)$$

Like the two-layer structure, therefore, only the medium-temperature region becomes an aperture region, thereby realizing super-resolution.

In such a case where the intermediate layer is formed, which has low Curie temperature, the readout layer can be an in-plane magnetization film at room temperature and raised temperatures and be a perpendicular magnetization film at intermediate temperatures therebetween in its layered structure together with the intermediate and recording layers, though the readout layer has no characteristic that the layer structure in its single layer state returns to an in-plane magnetization film at raised temperatures. Thus, the recording medium comprising the intermediate layer is advantageous in that material can be selected from a wider range.

Since the intermediate layer need not to contribute to the magneto-optic effect, reproduction characteristic do not deteriorate even if Curie temperature is set to a low value.

Although, in the above description, it is assumed for convenience sake that the width of the interface magnetic

domain walls between the readout layer and the recording layer can be neglected, the above description applies a case where the interface magnetic domain walls enter the readout layer to have a thickness which cannot be neglected. However, when the interface magnetic domain walls between the readout layer and the recording layer occur on the side of the readout layer, magnetization of the recording layer is transferred to a portion of the readout layer, as in the state of spin orientation schematically shown in FIGS. 7(a) and 7(b). If the interface magnetic domain walls become too thick, therefore, it is difficult to completely mask magnetization information recorded in the recording layer. It is thus preferable to thicken the readout layer or increase the in-plane anisotropy in the low-temperature region.

Description will now be made of a case where the above magneto-optical recording medium comprising three magnetic films is improved. In this case, the intermediate layer is interposed between the readout layer and the recording layer, and the Curie temperature thereof is higher than room temperature and lower than Curie temperatures of the readout layer and recording layer. In addition to these conditions, the in-plane anisotropy of the intermediate layer at temperature near room temperature must be larger than that of the readout layer. In order to increase in-plane anisotropy, for example, when rare-earth and iron group alloy is used, rare-earth elements or iron group elements may be predominant so that  $M_s$  of the intermediate layer at room temperature is increased.

When such an intermediate layer is interposed between the readout layer and the recording layer, the interface magnetic domain walls can be enclosed in the intermediate layer from room temperature to the aperture region, as shown in FIGS. 8(a) and 8(b).

Thus, the readout layer stably becomes an in-plane magnetization film within the low-temperature region, and it is possible to completely mask magnetization information recorded in the recording layer.

If the Curie temperature of the intermediate layer is lower than Curie temperature of the recording layer and higher by a degree which causes no cutting of exchange coupling between the readout layer and the recording layer in the medium-temperature region within the light spot,  $M_s$  of the intermediate layer is sufficiently small in the medium-temperature region, and the in-plane anisotropy thereof is decreased, thereby increasing perpendicular magnetic anisotropy. At the readout temperature, even when the intermediate layer itself has no perpendicular magnetic anisotropy, perpendicular magnetic anisotropy can be imparted to the intermediate layer by magnetic coupling force from the recording layer and the readout layer which came to have perpendicular magnetic anisotropy.

In the medium-temperature region, therefore, magnetization of the recording layer is transferred to the readout layer. In the high-temperature region, the temperature of the intermediate layer reaches Curie temperature, and exchange coupling force is eliminated, as described above. As a result, the readout layer becomes an in-plane magnetization film.

As shown in FIG. 9, therefore, the mask region for masking magnetization information recorded in the recording layer, and the aperture region for detecting the magnetization information are formed within the light spot. Since the aperture region can be formed to have an area smaller than the light spot, signals with periodicity below the diffraction limit of light can be detected. Further, as described above, the mask can completely be operated on the front side.

Since a mark on an adjacent track can completely be masked, the density of the adjacent track can further be improved.

In this case, the intermediate layer is preferably formed by using material such as a Gd alloy or the like which has low anisotropy and easily forms interface magnetic domain walls, for example, GdFe, GdFeCo or the like, or the material to which a non-magnetic element such as Al, Cu or Cr is added for decreasing Curie temperature.

The thickness of the intermediate layer may be equal to or more than the thickness of the interface magnetic domain walls between the readout layer as an in-plane magnetization film and the recording layer as a perpendicular magnetization film. On the other hand, if the intermediate layer is too thick, the total thickness of the magnetic layers is increased, thereby necessitating much power for recording. The excessively thick intermediate layer is thus undesirable. The thickness of the intermediate layer is preferably 20 Å to 200 Å, more preferably 50 Å to 150 Å.

In regard to the physical properties of the readout layer, the intermediate layer and the recording layer, assuming that the Curie temperatures of the readout layer, the intermediate layer and the recording layer are  $T_1$ ,  $T_3$  and  $T_2$ ; the compensation temperature of the readout layer is  $T_{comp1}$ ; the saturation magnetizations of the readout layer, the intermediate layer and the recording layer are  $M_{s1}$ ,  $M_{s2}$  and  $M_{s3}$ , effective perpendicular magnetic anisotropy constants are  $K_{L1}$ ,  $K_{L3}$  and  $K_{L2}$ ; and the energy values of perpendicular magnetic anisotropy is  $K_{u1}$ ,  $K_{u3}$  and  $K_{u2}$ ; the following equation (9) is obtained:

$$K_{Li} = K_{ui} - 2\pi M_{si}^2 \quad (i=1, 2, 3) \quad (9)$$

At room temperature, the effective perpendicular magnetic anisotropy constants  $K_{L1}$ ,  $K_{L3}$  and  $K_{L2}$  may have the following relation:

$$K_{L3} < K_{L1} < K_{L2} \quad (10)$$

At room temperature, examples satisfying the above relation are as follows:

$$M_{s1} < M_{s3} \quad (11)$$

$$M_{s2} < M_{s3} \quad (12)$$

In addition, as described above, the Curie temperatures must satisfy the relation (13) below.

$$RT \text{ (room temperature)} < T_{c3} < T_{c1} \quad (13)$$

FIGS. 10(a) through 10(c) shows an example of temperature tendencies of saturation magnetization of the readout layer, the intermediate layer and the recording layer, which satisfy the above conditions.

In order to decrease the in-plane anisotropy of the intermediate layer, as described above,  $M_s$  may be increased, or energy of perpendicular magnetic anisotropy  $K_u$  may be decreased or made negative (in-plane anisotropy) by adding elements such as Co and the like, which increase in-plane anisotropy.

As described above, in the information reproducing method using the magneto-optical recording medium of the present invention, since a reproducible portion within the laser beam spot is located in a narrow zone between a high-temperature portion and a low-temperature portion, it is possible to reproduce information with high resolution even if the information is recorded in higher density. A higher C/N ratio can also be expected because the detecting region is placed in a center of the laser beam spot. The reason for this is explained hereinafter.

Intensity distribution of the laser beam is of a Gaussian type and the intensity at a center thereof is highest. Thus, the closer to the center of the spot a position, where information is reproduced, is, the better the C/N ratio becomes. Generally, the center of the spot is coincident with the center of temperature distribution of the medium when the recording medium moves. The highest temperature point shifts toward the moving direction of the medium. Therefore, when the highest-temperature point is selected as a detectable area, the detecting area will be deviated from the center of the spot (FIG. 12).

Although the present invention is described in detail below with reference to experimental examples, the present invention is not limited to these experimental examples within the scope of the gist of the invention.

(First Experimental Example)

Targets Si, Tb, Gd, Fe, Co, Al and Cu were installed in a DC magnetron sputtering equipment, and a glass substrate was held on a holder. Thereafter, air was vacuum-exhausted from a chamber to establish a high vacuum level of less than  $1 \times 10^{-5}$  Pa by using a cryosorption pump.

Ar gas was introduced into the chamber while vacuum-exhausting air, until the level of 0.3 Pa of Ar gas was reached. Then, a SiN layer, which functioned as an interference dielectric film, was deposited to a thickness of 700 Å on the surface of the substrate. A GdFeCo layer was (thickness: 400 Å) was deposited as a readout layer, and a TbFeCo layer (thickness: 400 Å) was deposited as a recording layer. Then, another SiN layer (thickness: 800 Å), which functioned as a protective dielectric film, was deposited to form a magneto-optical recording medium of the present invention having the two-layer structure shown in FIG. 3(a).

When the SiN layer was formed,  $N_2$  gas was introduced in addition to the Ar gas and the deposition is performed by DC reactive sputtering. The GdFeCo layer and the TbFeCo layer were formed by applying DC powers to the targets of Gd, Fe, Co and Tb, respectively.

The composition of the GdFeCo layer was adjusted so that its compensation and Curie temperatures were 240° C. and over 400° C., respectively.

The composition of the TbFeCo layer was adjusted so that its compensation and Curie temperatures were less than room temperature and 230° C., respectively.

It was found that Kerr effect (residual Kerr rotation angle), when no magnetic field was applied, appeared only in a temperature range from 130° C. to 180° C., as shown in FIG. 13, and a perpendicular magnetization film was established, by measuring the residual  $\theta_K$  at the time of magnetic field=zero as the temperature of the layered films was raised.

(Second Experimental Example)

A magneto-optical recording medium was fabricated, which had the same layer structure as the above first example except that a polycarbonate substrate having a diameter of 130 mm and pregrooves was used.

Results of measurement of recording-reproducing characteristics of the magneto-optical recording medium were as follows. A measuring instrument comprised an objective lens of 0.55 N.A. and a projector for outputting a laser beam of 780 nm wavelength. Power for recording was preset at 8 mW, and linear velocity was 9 m/sec. Then, 6–15 MHz carrier signal was recorded in the recording layer by using a field modulation system in which a magnetic field of  $\pm 2000$  e was stepwisely applied. The dependency of C/N ratio on the recorded mark length was measured. The reproducing power was set to a value (2.5 to 3.5 mW) so that C/N ratio is maximized.

Table 1 shows the C/N ratios of the carrier signals recorded at 15 MHz (mark length:  $30\text{ }\mu\text{m}$ ), 11.25 MHz (mark length:  $0.40\text{ }\mu\text{m}$ ), and 9 MHz (mark length:  $0.50\text{ }\mu\text{m}$ ).

Then, crosstalk with an adjacent track was measured. The crosstalk was expressed as a difference between a reproduced signal in a land portion where a signal with a mark length of  $1.0\text{ }\mu\text{m}$  was recorded, and the reproduced signal in an adjacent group portion. Results are shown in Table 1. (Third Experimental Example)

A magneto-optical recording medium of the present invention comprising a readout layer, a recording layer and an intermediate layer with low Curie temperature provided therebetween was fabricated and evaluated.

The same film forming instrument and film forming method as those employed in the second experimental example were used. A SiN layer as an interference dielectric layer was deposited to a thickness of  $830\text{ }\text{\AA}$  on the surface of a polycarbonate substrate having a diameter of 130 mm and pregrooves. A GdFeCo layer (thickness:  $400\text{ }\text{\AA}$ ) was deposited as a readout layer, a TbFeCoAl layer (thickness:  $100\text{ }\text{\AA}$ ) was deposited as an intermediate layer, a TbFeCo layer (thickness:  $300\text{ }\text{\AA}$ ) was deposited as a recording layer. Then, another SiN layer (thickness:  $700\text{ }\text{\AA}$ ) was deposited as a protective dielectric layer to form a magneto-optical recording medium having the structure shown in FIG. 3(b).

When the SiN layer was formed,  $\text{N}_2$  gas was introduced in addition to the Ar gas, and the deposition was performed by DC reactive sputtering. The GdFeCo layer and the TbFeCo layer were formed by applying DC power to targets of Gd, Fe, Co and Tb, respectively, and utilizing spontaneous sputtering. The compositions of those layers were controlled by adjusting the DC powers applied to the respective targets in sputtering film formation.

The composition of the GdFeCo readout layer was set so that its compensation and Curie temperatures are  $250^\circ\text{C}$ . and over  $310^\circ\text{C}$ ., respectively. The composition of the TbFeCoAl intermediate layer was set so that its Curie temperature is  $150^\circ\text{C}$ . The composition of the TbFeCo recording layer was set so that its Curie temperature is  $210^\circ\text{C}$ .

The mark length dependency of C/N ratio, and crosstalk were measured by the same method as in the second experimental example. Results are shown in Table 1.

(Fourth to Seventh Experimental Examples)

Magneto-optical recording media of the present invention having a two-layer structure was fabricated by the same film forming equipment as that used in the second and third experimental examples, and the mark length dependency of C/N ratios were measured by the same method. The measured physical property values, C/N ratios and crosstalk are shown in Table 1.

(Eighth and Ninth Experimental Examples)

Magneto-optical recording media of the present invention having a three-layer structure comprising an intermediate layer with low Curie temperature were fabricated by the same film forming instrument as that used in the second to seventh experimental examples. The mark length dependencies of C/N ratios were measured by the same method as in the second to seventh experimental examples. The measured physical property values, C/N ratios and crosstalk of the respective layers are shown in Table 1.

(Tenth Experimental Example)

A magneto-optical recording medium of the present invention having a three-layer structure comprising an intermediate layer with low Curie temperature and in-plane anisotropy which was larger than that of a readout layer in a low-temperature region within a light beam spot, was

fabricated by the same method as that employed in the second to ninth experimental examples.

A SiN dielectric layer of 900 Å, a GdFeCo readout layer of 400 Å, a GdFe intermediate layer of 100 Å, a TbFeCo recording layer of 300 Å and a SiN protective layer were successively formed on a glass substrate to form a sample having the structure shown in FIG. 3(b). When each of the SiN layers was formed, a N<sub>2</sub> gas was introduced in addition to a Ar gas, and the deposition was performed by DC reactive sputtering. The mixing ratio between the Ar gas and N<sub>2</sub> gas was adjusted so that the refractive index is 2.1.

The composition of the GdFeCo readout layer was set so that the layer is RE-rich and has saturation magnetization Ms of 160 emu/cc at room temperature, and its compensation temperature and Curie temperature are 205° and over 300° C., respectively.

The composition of the TbFe intermediate layer was set so that the layer is RE-rich and has a saturation magnetization Ms of 520 emu/cc at room temperature, and its Curie temperature is 150° C.

The composition of the TbFeCo recording layer was set so that the layer is TM-rich and has a saturation magnetization of 200 emu/cc, and its Curie temperature is 220° C.

The dependency of the Kerr rotation angle ( $\theta_K$ ) on an external magnetic field was measured by applying a semiconductor laser beam of 830 nm to a sample having layers, which were formed on a glass substrate by the above method, from the side of the glass substrate. The measurement was performed by heating the sample from room temperature to about 200° C. FIG. 13 shows the temperature dependency of the Kerr rotation angle (residual Kerr rotation angle:  $\theta_K^R$ ) at the time of external magnetic field=0. It is found from FIG. 13 that the residual Kerr rotation angle  $\theta_K^R$  is substantially zero from room temperature to about 140° C., then rapidly increases from about 140° C. and becomes zero at about 200° C.

(Eleventh Experimental Example)

A magneto-optical recording film having the same layer structure and layer compositions as those in the tenth experimental example was formed on a polycarbonate substrate with pre-grooves to form a magneto-optical recording medium of the present invention.

The dependency of C/N ratio on the recorded mark length and crosstalk were measured by the same method as in the second to ninth experimental examples. Results are shown in Table 1.

(Twelfth Experimental Example)

A SiN dielectric layer of 900 Å, a GdFeCo readout layer of 400 Å, a GdFe intermediate layer of 120 Å, a TbFeCo recording layer of 300 Å, and a SiN protective layer of 700 Å were successively formed on a polycarbonate substrate by the same instrument and method as those employed in the first experimental example to obtain a sample having the structure shown in FIG. 3(b).

The composition of the GdFeCo readout layer was set so that the layer is RE-rich and has a saturation magnetization Ms of 180 emu/cc at room temperature, and its compensation temperature and Curie temperature are 220° C. and over 300° C., respectively.

The composition of the GdFe intermediate layer was set so that the layer is RE-rich and has a saturation magnetization Ms of 680 emu/cc at room temperature, and its Curie temperature is 180° C.

The composition of the TbFeCo recording layer was set so that the layer is TM-rich and has a saturation magnetization Ms of 200 emu/cc at room temperature, and its Curie temperature is 220° C.

TABLE 1

Readout layer					Intermediate layer			
Composition	Thick Å	Ms e/cc	T <sub>com</sub> °C.	T <sub>c</sub> °C.	Composition	Thick Å	Ms e/cc	T <sub>c</sub> °C.
Example 1,2	Gd <sub>31</sub> (Fe <sub>55</sub> Co <sub>45</sub> ) <sub>69</sub>	400	—	240	400< —	—	—	—
Example 3	Gd <sub>30</sub> (Fe <sub>60</sub> Co <sub>40</sub> ) <sub>70</sub>	400	—	250	310< (Tb <sub>24</sub> (Fe <sub>95</sub> Co <sub>5</sub> ) <sub>76</sub> ) <sub>95</sub> Al <sub>5</sub>	100	100	150
Example 4	Gd <sub>28</sub> (Fe <sub>65</sub> Co <sub>35</sub> ) <sub>72</sub>	350	—	205	300< —	—	—	—
Example 5	(Gd <sub>75</sub> Tb <sub>27</sub> ) <sub>70</sub> Co <sub>30</sub>	300	—	205	300< —	—	—	—

TABLE 1-continued

Example 6	Gd <sub>28</sub> (Fe <sub>60</sub> Co <sub>40</sub> ) <sub>72</sub>	400	—	205	300< —	—	—	—
Example 7	(Nd <sub>10</sub> Gd <sub>90</sub> ) <sub>30</sub> (Fe <sub>60</sub> Co <sub>40</sub> ) <sub>70</sub>	370	—	—	300< —	—	—	—
Example 8	Gd <sub>29</sub> (Fe <sub>50</sub> Co <sub>50</sub> ) <sub>71</sub>	400	—	—	300< (Tb <sub>23</sub> (Fe <sub>94</sub> Co <sub>6</sub> ) <sub>77</sub> ) <sub>94</sub> Cu <sub>6</sub>	50	80	170
Example 9	Gd <sub>28</sub> (Fe <sub>70</sub> Co <sub>30</sub> ) <sub>72</sub>	360	260	—	300< Gd <sub>40</sub> Fe <sub>60</sub>	80	460	188
Example 10,11	Gd <sub>28</sub> (Fe <sub>60</sub> Co <sub>40</sub> ) <sub>72</sub>	400	180	205	300< Gd <sub>45</sub> Fe <sub>55</sub>	100	520	150
Example 12	Gd <sub>29</sub> (Fe <sub>60</sub> Co <sub>40</sub> ) <sub>71</sub>	400	200	220	300< Gd <sub>45</sub> (Fe <sub>90</sub> Co <sub>10</sub> ) <sub>50</sub> Al <sub>5</sub>	120	680	180
Example 13	Gd <sub>27</sub> (Fe <sub>68</sub> Co <sub>32</sub> ) <sub>73</sub>	400	150	188	300< Gd <sub>45</sub> (Fe <sub>98</sub> Co <sub>2</sub> ) <sub>55</sub>	80	520	170
Example 14	Gd <sub>27</sub> (Fe <sub>65</sub> Co <sub>35</sub> ) <sub>73</sub>	400	160	188	300< Gd <sub>40</sub> (Fe <sub>94</sub> Co <sub>6</sub> ) <sub>60</sub>	90	470	165
Co. Ex. 1,2	Gd <sub>27</sub> (Fe <sub>65</sub> Co <sub>35</sub> ) <sub>73</sub>	400	130	280	300< —	—	—	—
Co. Ex. 3	Gd <sub>37</sub> (Fe <sub>60</sub> Co <sub>40</sub> ) <sub>68</sub>	400	270	280	300< —	—	—	—

Recording layer				C/N (dB)				
Composition	Thick Å	Ms e/cc	T <sub>c</sub> °C.	0.30μ	0.40μ	0.50μ	Cross-talk dB	
Example 1,2	Tb <sub>20</sub> (Fe <sub>80</sub> Co <sub>20</sub> ) <sub>80</sub>	400	-200	230	30	33	44	-30
Example 3	Tb <sub>20</sub> (Fe <sub>80</sub> Co <sub>20</sub> ) <sub>80</sub>	300	-200	210	36	41	47	-35
Example 4	Tb <sub>20</sub> (Fe <sub>80</sub> Co <sub>20</sub> ) <sub>80</sub>	370	-200	220	30	34	45	-31
Example 5	Tb <sub>20</sub> (Fe <sub>80</sub> Co <sub>20</sub> ) <sub>80</sub>	400	-200	220	30	33	44	-30
Example 6	Dy <sub>20</sub> (Fe <sub>80</sub> Co <sub>20</sub> ) <sub>80</sub>	380	-200	220	31	32	44	-29
Example 7	Tb <sub>20</sub> (Fe <sub>80</sub> Co <sub>20</sub> ) <sub>80</sub>	400	-200	220	30	31	46	-28
Example 8	Tb <sub>20</sub> (Fe <sub>80</sub> Co <sub>20</sub> ) <sub>80</sub>	450	-200	220	35	41	46	-36
Example 9	Tb <sub>20</sub> (Fe <sub>80</sub> Co <sub>20</sub> ) <sub>80</sub>	300	-200	220	39	44	47	-35
Example 10,11	Tb <sub>20</sub> (Fe <sub>80</sub> Co <sub>20</sub> ) <sub>80</sub>	300	-200	220	41	45	48	-40
Example 12	Tb <sub>20</sub> (Fe <sub>80</sub> Co <sub>20</sub> ) <sub>80</sub>	300	-200	220	39	44	48	-41
Example 13	Tb <sub>20</sub> (Fe <sub>80</sub> Co <sub>20</sub> ) <sub>80</sub>	300	-200	220	40	45	48	-40
Example 14	Tb <sub>20</sub> (Fe <sub>80</sub> Co <sub>20</sub> ) <sub>80</sub>	300	-200	220	40	44	48	-41
Co. Ex. 1,2	Tb <sub>20</sub> (Fe <sub>80</sub> Co <sub>20</sub> ) <sub>80</sub>	300	-200	220	20	26	46	-20
Co. Ex. 3	Tb <sub>20</sub> (Fe <sub>80</sub> Co <sub>20</sub> ) <sub>80</sub>	300	-200	220	26	29	47	-21

e/cc = emu/cc

Then, the dependency of C/N ratio on the recorded mark length and crosstalk were measured by the same method as in the second to ninth experimental examples. Results are shown in Table 1.

(Thirteenth Experimental Example)

A SiN dielectric layer of 900 Å, a GdFeCo readout layer of 400 Å, a GdFe intermediate layer of 80 Å, a TbFeCo recording layer of 300 Å, and a SiN protective layer of 700 Å were successively formed on a polycarbonate substrate by the same instrument and method as those employed in the first experimental example to obtain a sample having the structure shown in FIG. 3(b).

The composition of the GdFeCo readout layer was set so that the layer is RE-rich and has a saturation magnetization  $M_s$  of 150 emu/cc at room temperature, and its compensation temperature and Curie temperature are 188° C. and over 300° C., respectively.

The composition of the GdFe intermediate layer was set so that the layer is RE-rich and has a saturation magnetization  $M_s$  of 520 emu/cc at room temperature, and its Curie temperature is 170° C.

The composition of the TbFeCo recording layer was set so that the layer is TM-rich and has a saturation magnetization  $M_s$  of 200 emu/cc at room temperature, and its Curie temperature is 220° C.

Then, the dependency of C/N ratio on the recorded mark length and crosstalk were measured by the same method as in the second to ninth experimental examples. Results are shown in Table 1.

(Fourteenth Experimental Example)

A SiN dielectric layer of 900 Å, a GdFeCo readout layer of 400 Å, a GdFe intermediate layer of 90 Å, a TbFeCo recording layer of 300 Å, and a SiN protective layer of 700 Å were successively formed on a polycarbonate substrate by the same instrument and method as those employed in the first experimental example to obtain a sample having the structure shown in FIG. 3(b).

The composition of the GdFeCo readout layer was set so that the layer is RE-rich and has a saturation magnetization  $M_s$  of 160 emu/cc at room temperature, and its compensation temperature and Curie temperature are 188° C. and over 300° C., respectively.

The composition of the GdFe intermediate layer was set so that the layer is RE-rich and has a saturation magnetization  $M_s$  of 470 emu/cc at room temperature, and its Curie temperature is 165° C.

The composition of the TbFeCo recording layer was set so that the layer is TM-rich and has a saturation magnetization  $M_s$  of 200 emu/cc at room temperature, and its Curie temperature is 220° C.

Then, the dependency of C/N ratio on the recorded mark length and crosstalk were measured by the same method as in the second to ninth experimental examples. Results are shown in Table 1.



## (First Comparative Experimental Example)

A SiN dielectric layer of 900 Å, a GdFeCo readout layer of 400 Å, a TbFeCo recording layer of 300 Å, and a SiN protective layer of 700 Å were successively formed on a polycarbonate substrate by the same instrument and method as those employed in the first experimental example to obtain a sample having the structure shown in FIG. 3(a).

The composition of the GdFeCo readout layer was set so that the layer is RE-rich and has a saturation magnetization  $M_s$  of 130 emu/cc at room temperature, and its compensation temperature and Curie temperature are 280° C. and about 300° C., respectively.

The composition of the TbFeCo recording layer was set so that the layer is TM-rich and has a saturation magnetization  $M_s$  of 200 emu/cc at room temperature, and its Curie temperature is 220° C.

This sample had the temperature dependency of residual  $\theta_K$  as shown in FIG. 15, and did not become again an in-plane magnetization film at high temperatures. As in this comparative example, in a recording medium having a two-layer structure comprising a readout layer and a recording layer in which the compensation temperature and Curie temperature are close to each other, the readout layer cannot be made an in-plane magnetization film at high temperatures.

## (Second Comparative Experimental Example)

Layers were formed on a polycarbonate substrate to form a magneto-optical recording medium by the same method as that employed in the second experimental example. Then, the dependency of C/N ratio on the recorded mark length and crosstalk were measured by the same method as in the second to ninth experimental examples. Results are shown in Table 1.

## (Third Comparative Experimental Example)

A SiN dielectric layer of 900 Å, a GdFeCo readout layer of 400 Å, a TbFeCo recording layer of 300 Å, and a SiN protective layer of 700 Å were successively formed on a polycarbonate substrate by the same instrument and method as those employed in the first experimental example to obtain a sample having the structure shown in FIG. 3(a).

The composition of the GdFeCo readout layer was set so that the layer is RE-rich and has a saturation magnetization  $M_s$  of 180 emu/cc at room temperature, and its compensation temperature and Curie temperature are 290° C. and about 300° C., respectively.

The composition of the TbFeCo recording layer was set so that the layer is TM-rich and has a saturation magnetization  $M_s$  of 200 emu/cc at room temperature, and its Curie temperature is 220° C.

Then, the dependency of C/N ratio on the recorded mark length and crosstalk were measured by the same method as in the second to ninth experimental examples. Results are shown in Table 1.

Comparison of the experimental examples 2 to 14 and comparative experimental examples 2 and 3 reveals that the present invention can significantly improve the C/N ratio and crosstalk with a short mark length.

Use of the magneto-optical recording medium and reproducing method of the present invention enable reproduction of a magnetic domain smaller than the diameter of a beam spot by using a simple instrument (conventional instrument) which requires no initialization magnet, and achievement of high-density recording in which the linear recording density and track density are further improved, thereby improving the C/N ratio.

What is claimed is:

1. A magneto-optical recording medium adapted to be heated from a room temperature range to a medium temperature range above the room temperature range and to a high temperature range above the medium temperature range, said medium comprising:

a first magnetic layer, which has an in-plane magnetization at the room temperature range, and which changes to a perpendicular magnetization at the medium temperature range;

a second magnetic layer having a perpendicular magnetization; and

a third magnetic layer, wherein the third magnetic layer is interposed between said first and second magnetic layers, and has a Curie temperature lower than those of said first and second magnetic layers, and has an in-plane magnetization at the room temperature range and changes to a perpendicular magnetization at the medium temperature range.

2. A method of reproducing, with a laser beam, information recorded on a magneto-optical recording medium comprising a first magnetic layer, a second magnetic layer having a perpendicular magnetization, and an intermediate layer therebetween having a Curie temperature higher than

a room temperature range, lower than the Curie temperature of the first and second magnetic layers, and in a high temperature range, the first magnetic layer having an in-plane magnetization at the room temperature range, changing to a perpendicular magnetization at a medium temperature range higher than the room temperature range and changing back to an in-plane magnetization at or above the Curie temperature of the intermediate layer in the high temperature range higher than the medium temperature range, said method comprising the steps of:

projecting a laser beam onto the magneto-optical recording medium from a side of the first magnetic layer;

heating the first magnetic layer with the laser beam so that the first magnetic layer has a portion in the room temperature range having in-plane magnetization and a portion in the medium temperature range having a perpendicular magnetization;

heating a portion of the intermediate layer at least to its Curie temperature so that a corresponding portion of the first magnetic layer in the high temperature range changes to an in-plane magnetization;

transferring information recorded in the second magnetic layer to the first magnetic layer by exchange coupling through the intermediate layer perpendicular magnetization of the first magnetic layer and magnetization of the second magnetic layer; and

reproducing the recorded information based on the magneto-optic effect of the light reflected from the magneto-optical recording medium.

\* \* \* \* \*

# ABSTRACT

A magneto-optical recording medium has a first magnetic layer which is an in-plane magnetization film at both room temperature and high temperatures and changed to a perpendicular magnetization film at intermediate temperatures, and a second magnetic layer which is composed of a perpendicular magnetization film. The recording medium enables realization of high S/N reproduction of information recorded at a pitch below the diffraction limit of light with a simple structure, and further improvement in linear recording density and track density.

FIG. 1

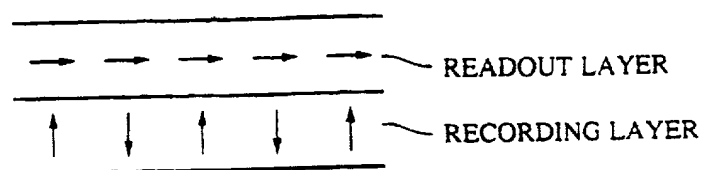


FIG. 2

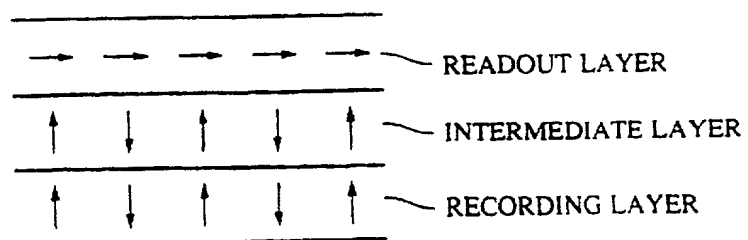


FIG. 3(a)

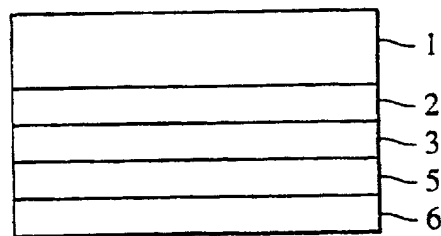
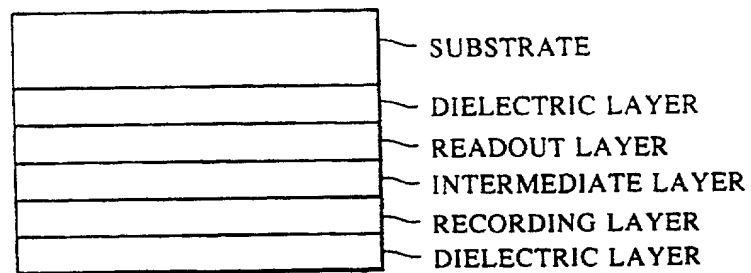


FIG. 3(b)



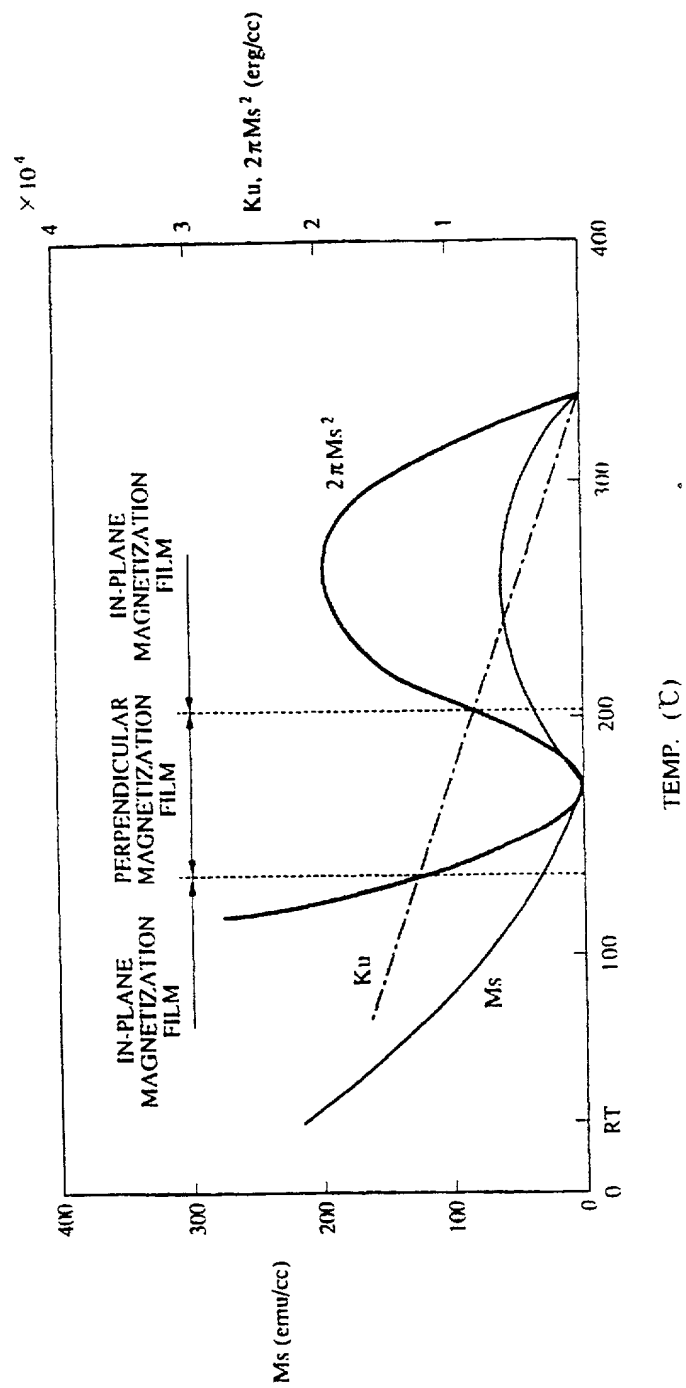


FIG. 4

FIG. 5

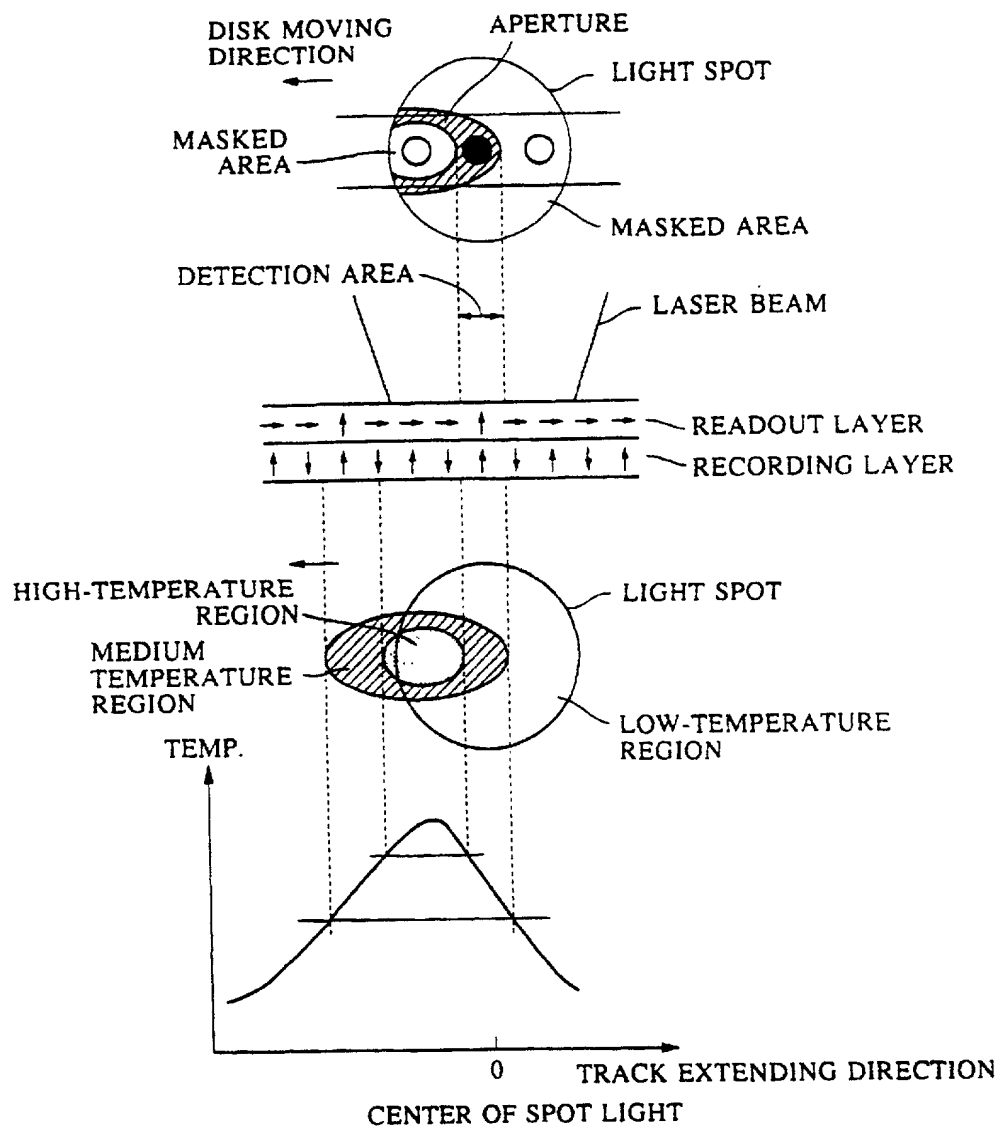
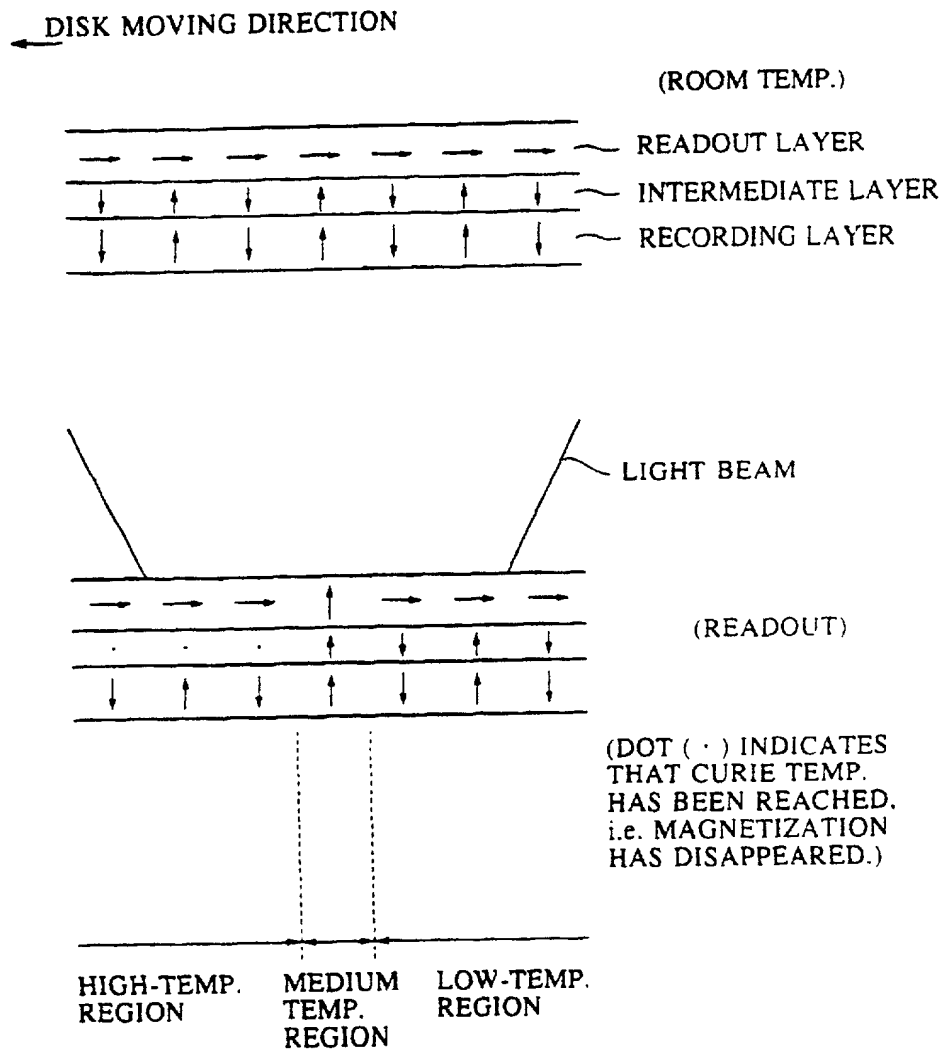
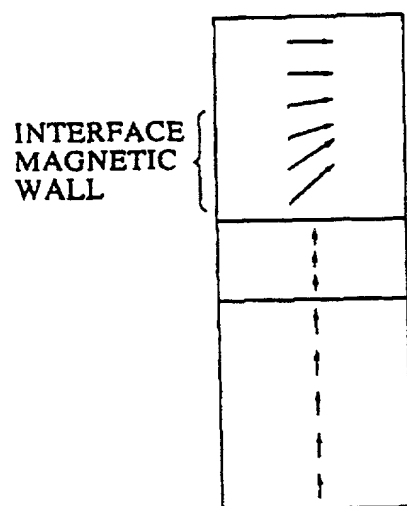




FIG. 6



**FIG. 7(a)**



**FIG. 7(b)**

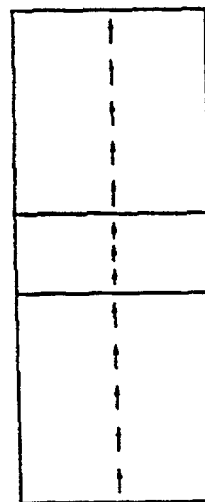


FIG. 8(a)

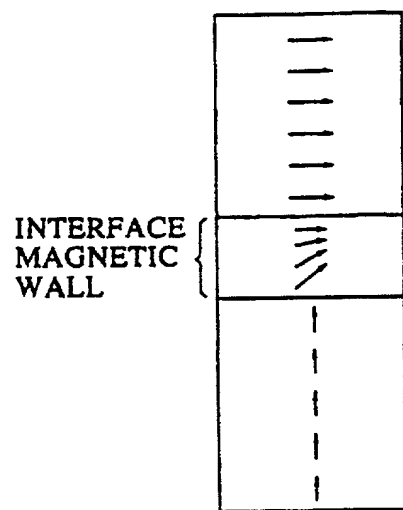


FIG. 8(b)

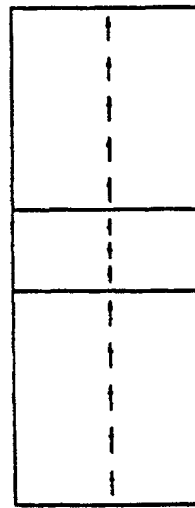
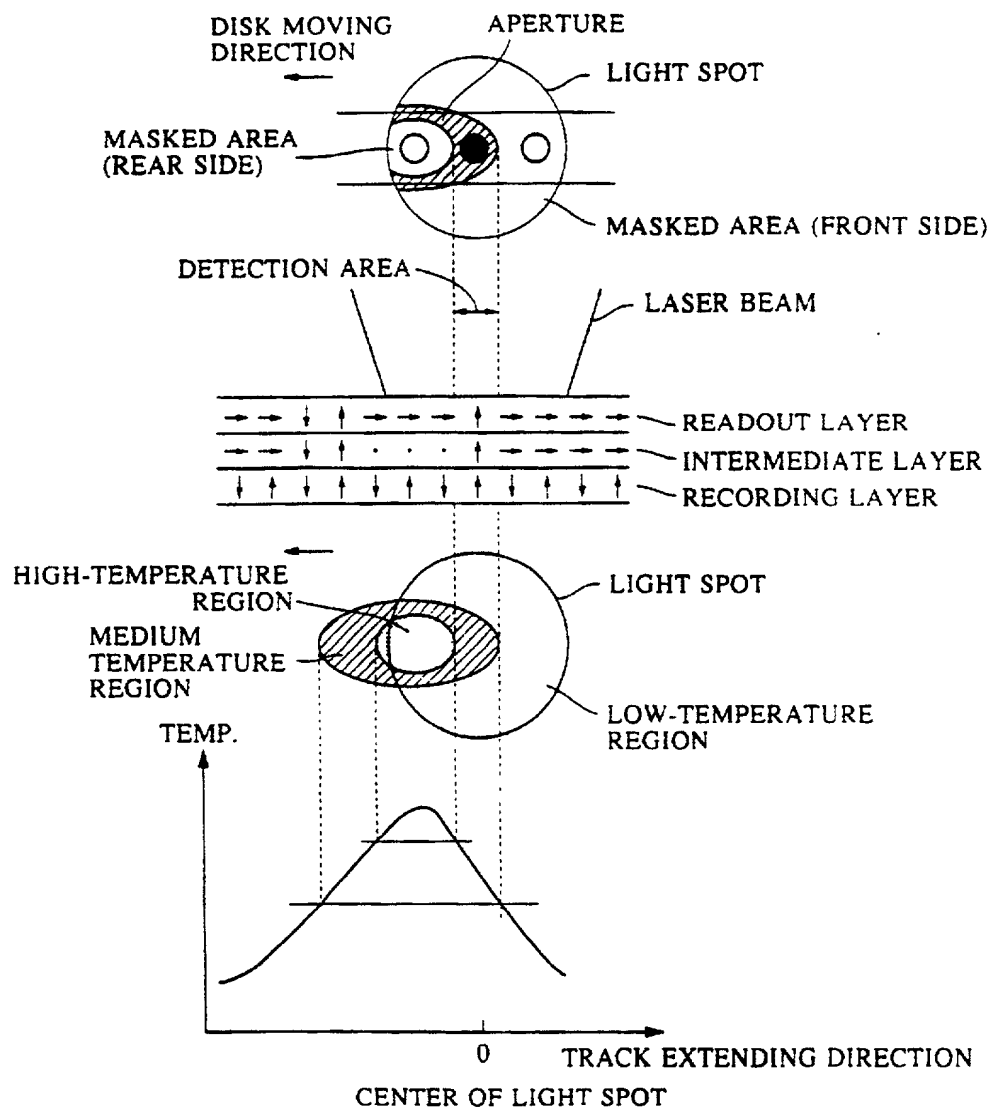


FIG. 9



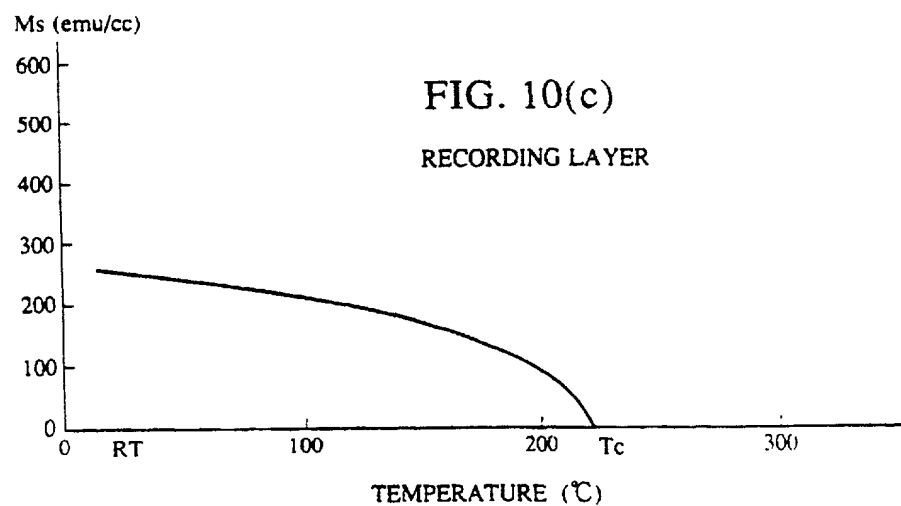
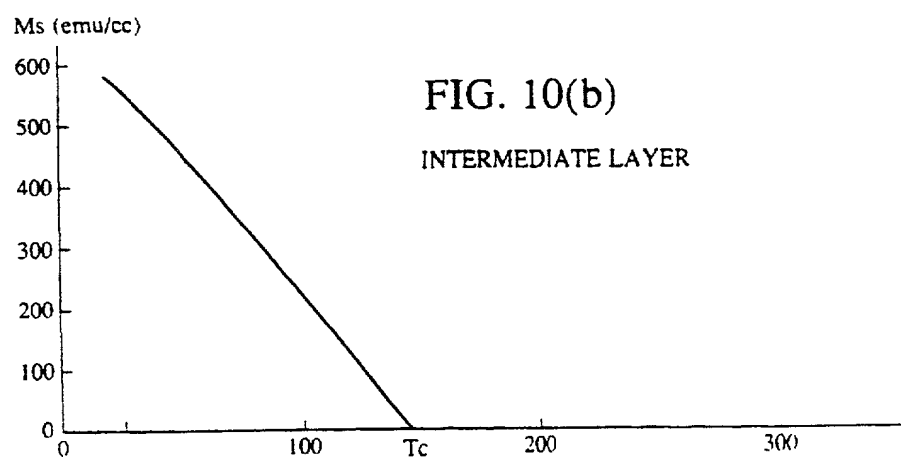
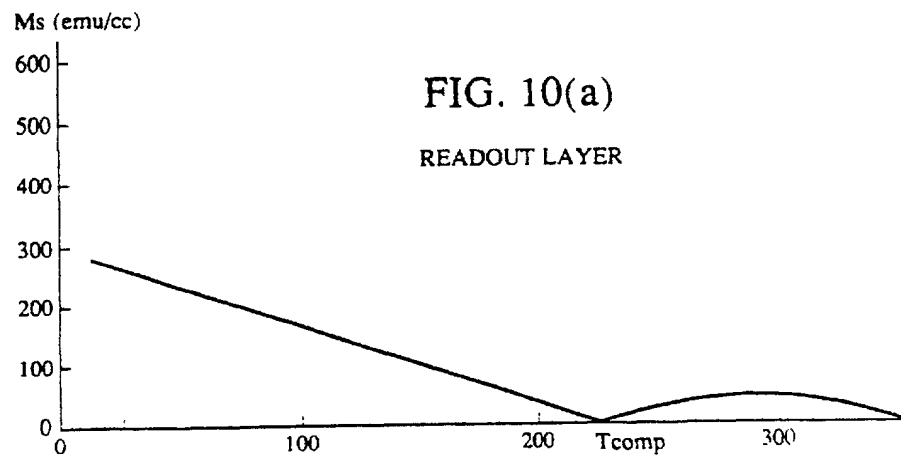


FIG. 11

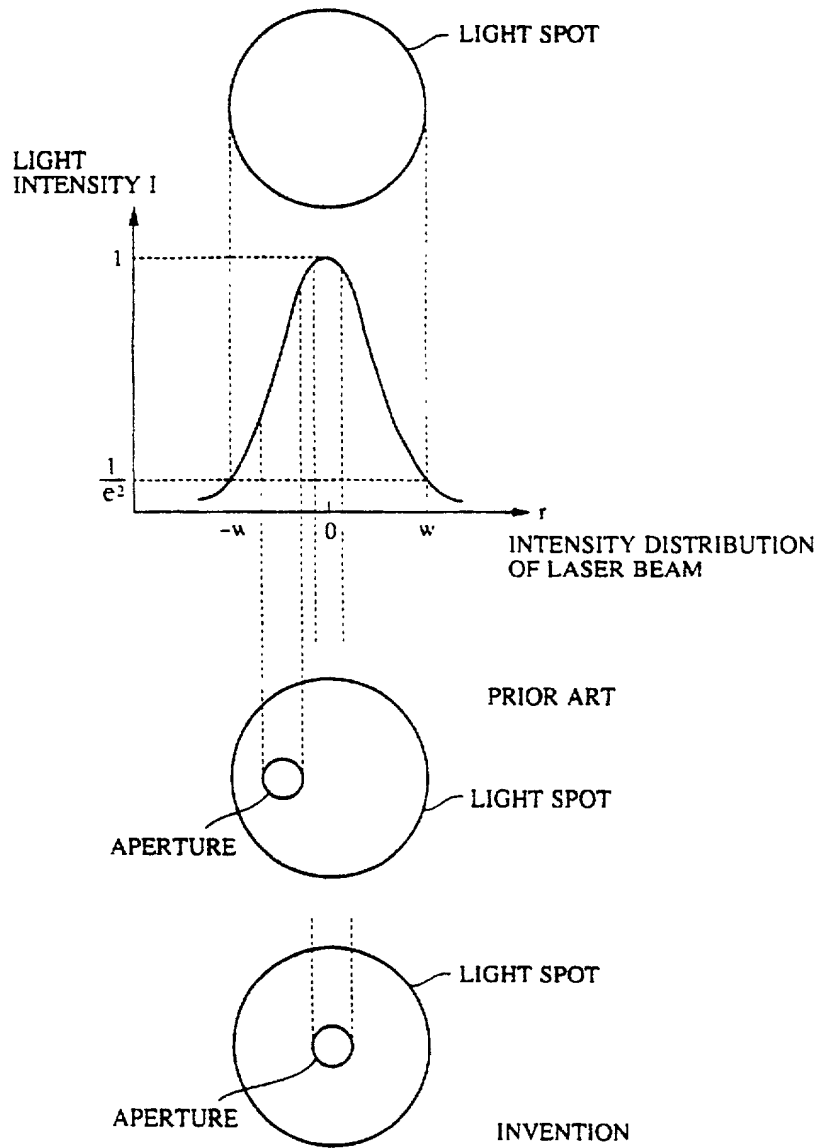


FIG. 12

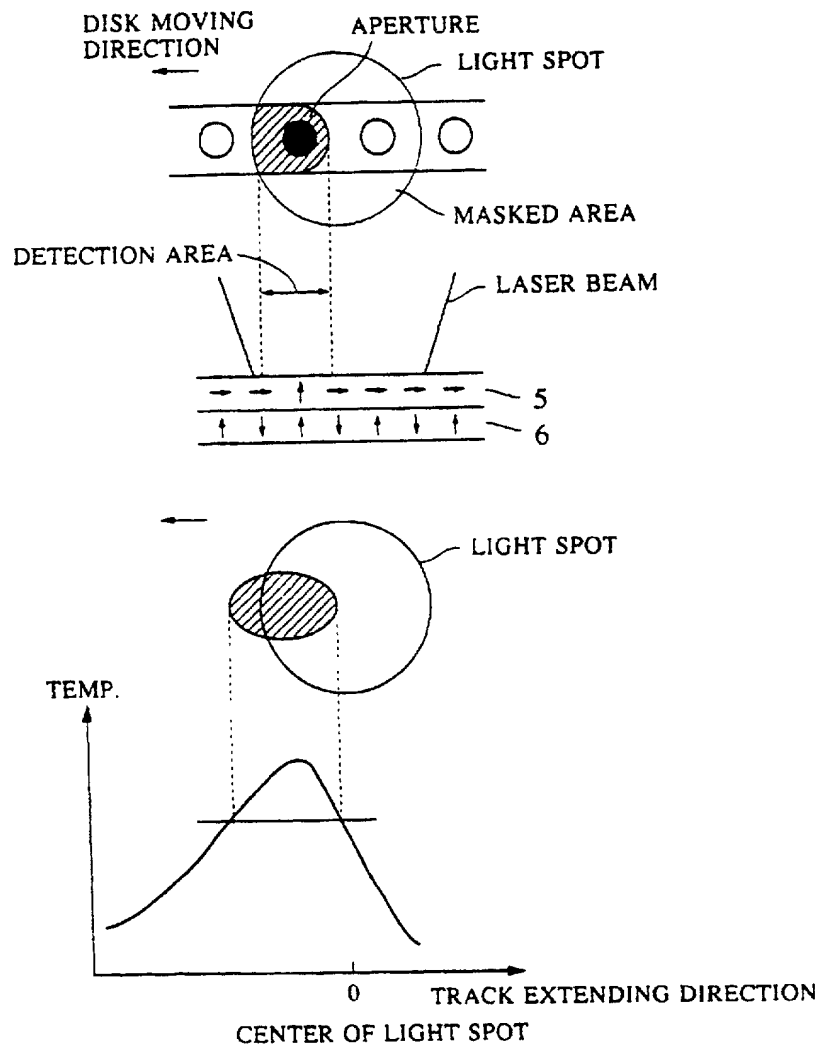
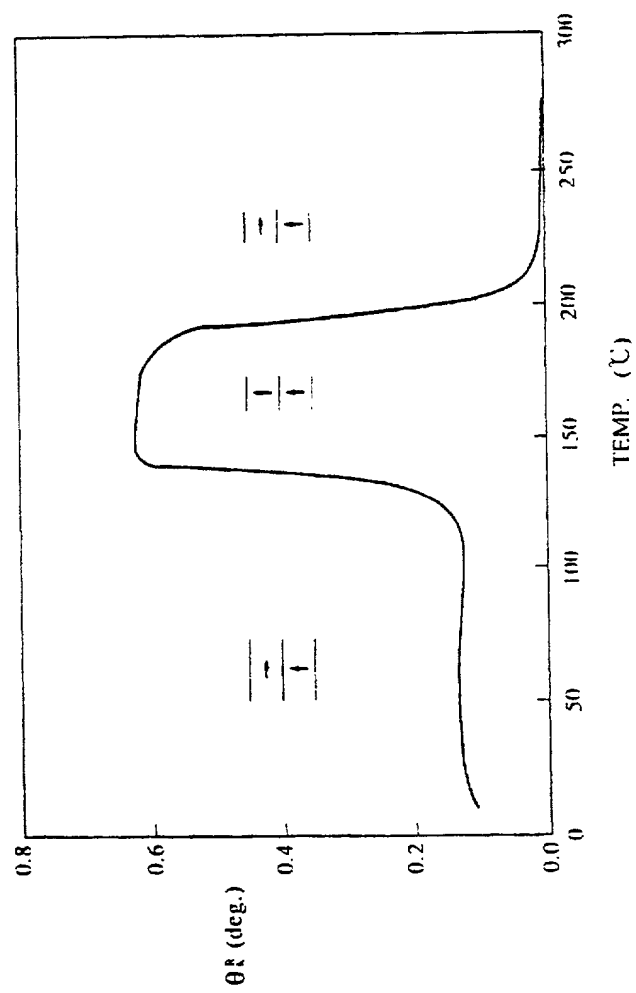


FIG. 13





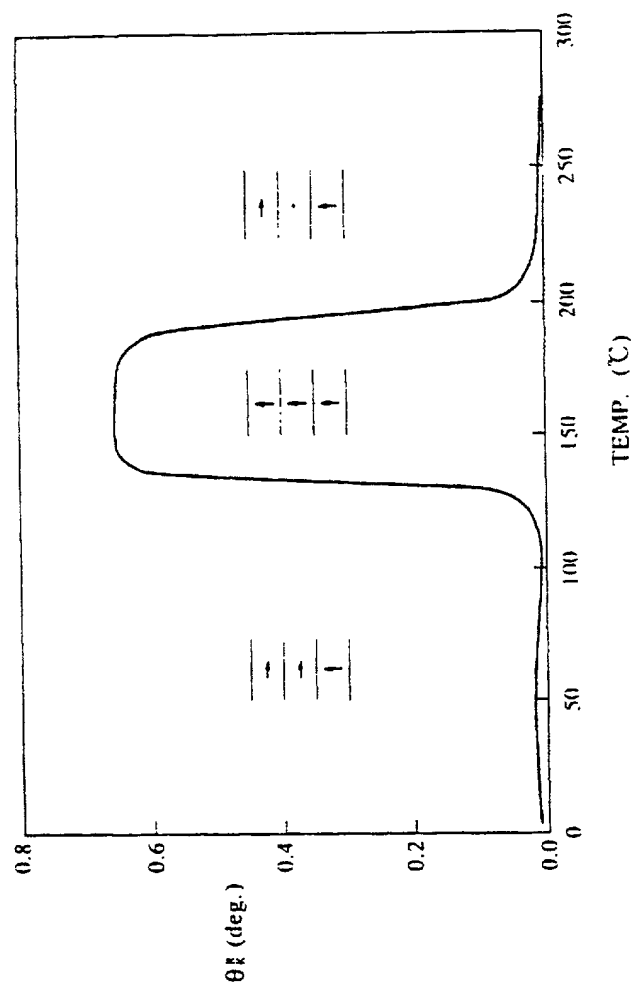


FIG. 14

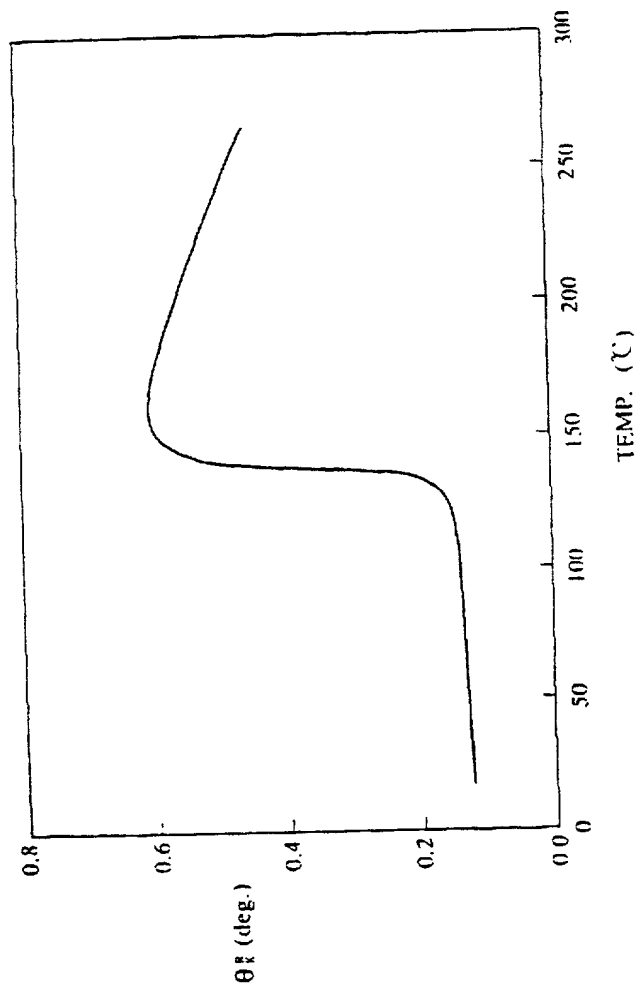


FIG. 15

35.G1008 CIP/C/REI

PATENT APPLICATION

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Reissue Application: ) Previous  
of U.S. Patent No. 5,831,944 : Examiner: A. Neyzari  
)  
NAOKI NISHIMURA : Previous  
) Group Art Unit: 2752  
Appln No.: Not Yet Assigned :  
)  
Filed: Herewith :  
)  
For: MAGNETO-OPTICAL :  
RECORDING MEDIUM AND )  
METHOD FOR REPRODUCING :  
INFORMATION FROM A )  
MAGNETO-OPTICAL :  
RECORDING MEDIUM HAVING )  
THREE LAYERS :  
)  
Issued: November 3, 1998 :

Commissioner for Patents  
Washington, D.C. 20231

**ATTENTION: APPLICATION DIVISION  
SPECIAL HANDLING UNIT**

LETTER ACCOMPANYING REISSUE APPLICATION

Sir:

Enclosed herewith for filing are the following papers  
constituting an application for reissue of United States Letters  
Patent No. 5,831,944 issued November 3, 1998, to NAOKI NISHIMURA  
for MAGNETO-OPTICAL RECORDING MEDIUM AND METHOD FOR REPRODUCING

INFORMATION FROM A MAGNETO-OPTICAL RECORDING MEDIUM HAVING THREE  
LAYERS:

1. Mounted soft copy of the specification and drawings.

2. A soft copy of the printed original patent.

3. A check in the amount of \$710.00.

This reissue application is filed on behalf of the inventor, Naoki Nishimura, having a post office address of c/o Canon Kabushiki Kaisha, 30-2, 3-chome, Shimomaruko, Ohta-ku, Tokyo, Japan.

Applicant hereby claims priority and preserves all rights to which he is entitled under 35 U.S.C. § 119 based on the following Japanese patent applications:

Appln. No.

Filed

5-038138

February 26, 1993

6-022653

February 21, 1994

4-230265

August 28, 1992

Applicant hereby offers to surrender the Letters Patent No. 5,831,944.

Pursuant to 37 C.F.R. § 1.174, please transfer the drawings from the patent file to the subject reissue application and, if necessary, prepare mounted copies of the original

drawings, charging the cost of the mounted copies to Deposit  
Account No. 06-1205.

U.S. Patent No. 5,831,944 is assigned of record to  
Canon Kabushiki Kaisha, Tokyo, Japan. The assignee consents to  
this reissue.


The undersigned attorney has been authorized to file  
the subject reissue application on behalf of the inventor and the  
assignee.

The Commissioner is hereby authorized to charge any  
additional fees that may be required under 37 C.F.R. § 1.16 or  
§ 1.17, and to credit any overpayment, to Deposit Account  
No. 06-1205.



Applicant's undersigned attorney may be reached in our New York office by telephone at (212) 218-2100. All correspondence should continue to be directed to our below listed address.

Respectfully submitted,

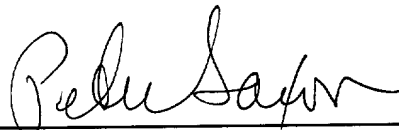

Attorney for Applicant

Registration No. 24947

FITZPATRICK, CELLA, HARPER & SCINTO  
30 Rockefeller Plaza  
New York, New York 10112-3801  
Facsimile: (212) 218-2200

NY\_MAIN 123729 v 1